

January 29, 2001



Full Lift Range

Low: 4.88" (124mm)

High: 48" (1220mm)

Specifications on page 2




Midrise Lifts

6,500 lb capacity

features: Electric..... **EELR338A**
Pneumatic..... **EELR339A**

- **Versatile** – low stance (4.88") easily accommodates low riding vehicles
 - rugged design handles full size pickups (even a Suburban)
 - increased lifting height (to 48") – almost 10" higher than EELR300A, provides plenty of working room
 - one piece solid roll formed deck (as compared to twin rails on EELR300A) accommodates cars, trucks, motorcycles, small engines, & many large, odd shaped parts
- **Multiple types of lifting**
 - adjustable frame contact lifting arms rotate through 360° (exclusive feature permits lifting at any factory recommended frame lift points), & optional truck adapters
 - pad style lifting with four (4) standard lift blocks
- **Available in electric or versions pneumatic**
- **Space saving scissor design lifts straight up** – adding stability, while requiring minimal floor space
- **Safety** – five (5) position mechanical safety locks (start at 27" & engage every 4")
 - foot pedal release of mechanical safety locks
 - twin cylinders with flow control monitoring system
- **"Oilite" bushings** at hinge points for maintenance free operation

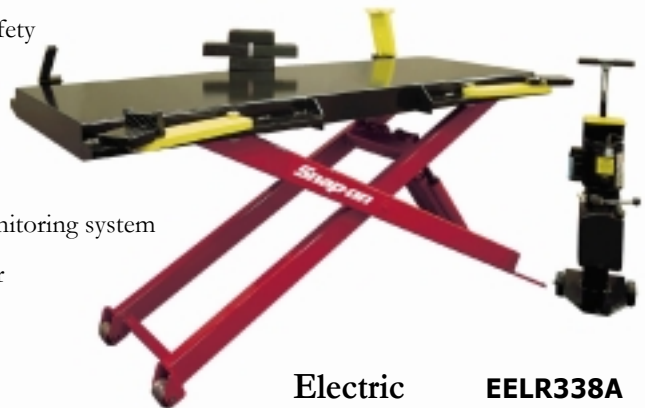

Electric **EELR338A**

Pneumatic **EELR339A**



WARNING

• Wear safety goggles while using lifts (user and bystanders.)



Do not exceed load limit of lift.

Do not raise or lower lift unless area is clear of people.

Lifts must be installed by experienced installer.