




SECURE VEHICLE GATEWAY

Using compatible diagnostic tools,
now you can seamlessly connect to
secure vehicle gateways

EMPOWER
UP

A large circular graphic with a glowing red and orange border. Inside the circle, there is a collage of automotive-related images: a technician in a blue shirt and cap working on a vehicle, a car's engine bay, and a car's interior. The text "EMPOWER" is written in large, bold, red, blocky letters across the middle, and "UP" is written in the same style below it, separated by a horizontal red line.

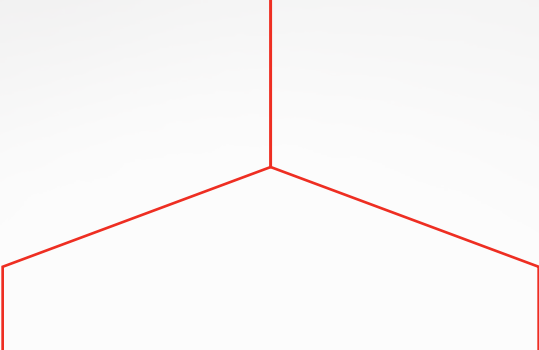

CONNECTING YOUR DIAGNOSTIC TOOL FOR USE WITH SECURE VEHICLE GATEWAYS

What you need:

- A compatible Snap-on diagnostic tool with Wi-Fi access
- An authorized AutoAuth account[s]
- A Snap-on® Profile Manager Account

Watch the Getting Connected video @

[SNAPON.COM/GATEWAY](https://snapon.com/gateway)




GETTING YOUR DIAGNOSTIC TOOL INFORMATION

Make sure your diagnostic tool is connected to Wi-Fi before you start!

1

You'll need some information from your diagnostic tool. Select **"System Settings or Tools"**, then **"Get Connected"**

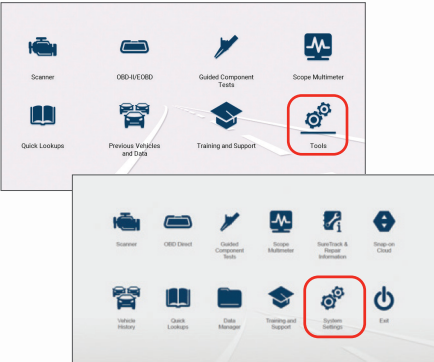


Remember your Device Information:

Serial number:.....

Pin Code:

Activation Code:

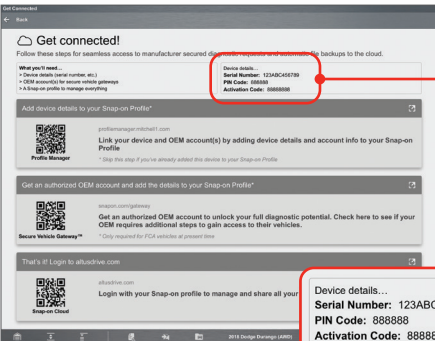

Device details...
Serial Number: 123ABC456789
PIN Code: 888888
Activation Code: 88888888

CREATING AN AUTOAUTH ACCOUNT

NOTE - AutoAuth charges a \$50 annual fee.

Make sure your diagnostic tool is connected to Wi-Fi before you start!

1

Go to autoauth.com and select “**Register Now**” and create an account.



Remember your Username and Password

.....

2

Check your email and verify your account.


3

Login to autoauth.com and follow the link to complete your registration as a “**Service Center Signup / Independent Technician Signup**”.

After entering the required information select “**Sign Up**”.

4

Select the “**Manage Tools**” tab and enter the required information.

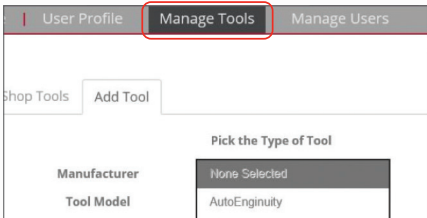

Shop Tools Add Tool

Pick the Type of Tool

Manufacturer
None Selected
AutoEnginuity

Tool Model

5

When done select “**Add**”.

Add

Your AutoAuth account is now complete.

CREATING A SNAP-ON PROFILE

1

A Snap-on Profile Manager account is required to **complete the process**. If you already have a Profile Manager account, log in and go to **Step 3**. [You would have a profile manager account if you have previously accessed SureTrack community or ALTUSDrive.]

2

To create a Profile Manager account, go to profilemanager.mitchell1.com.



3

Login to your account and select the **“Device Management”** tab.

Enter your **Diagnostic Tool Pin Code** and **Serial Number** from the Get Connected screen of your Tool [See Step 1 at the beginning of these instructions].

4

Select the “**Secure Vehicle Gateway**” tab, then select “**Add Secure Credentials**”.

Enter your “**AutoAuth**” account username and password and select “**Save**”.

5

Your Diagnostic Tool is now linked to your AutoAuth account allowing you to access your Secure Vehicle Gateways.

Note - Authorization Key is not needed.



Snap-on is a trademark of Snap-on Incorporated. All rights reserved. ©Snap-on Incorporated 2021.

EAZ0042L62C