

SNAP-ON[®] SECURITY LINK[™]

Using compatible diagnostic tools, now you can seamlessly connect to secure vehicle gateways

Snap-on[®]

CONNECTING YOUR DIAGNOSTIC TOOL FOR USE WITH SECURE VEHICLE GATEWAYS

What you need:

- A compatible Snap-on diagnostic tool with Wi-Fi access
- A Snap-on® Technician Profile account
- An authorized OEM account(s)

Watch the Getting Connected video @

[SNAPON.COM/SECURITYLINK](https://www.snapon.com/securitylink)




GETTING YOUR DIAGNOSTIC TOOL INFORMATION

Make sure your diagnostic tool is connected to Wi-Fi before you start!

1

You'll need some information from your diagnostic tool. Select "System Settings or Tools", then "Get Connected".

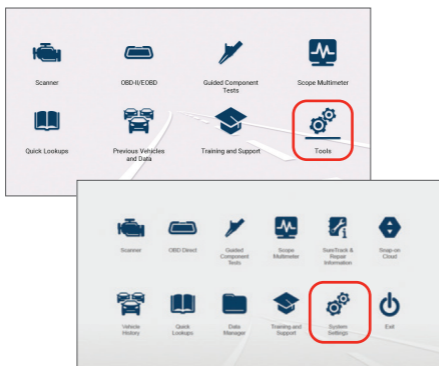


Remember your Device Information:

Serial Number:

Pin Code:

Activation Code:

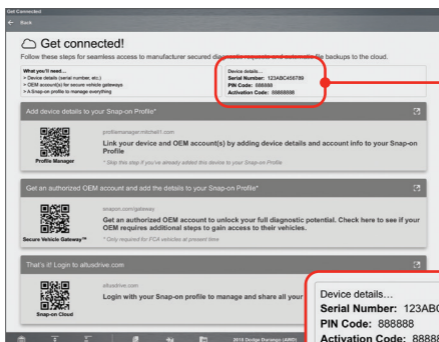

CREATING A SNAP-ON TECHNICIAN PROFILE ACCOUNT


1

A Snap-on Technician Profile account is required. If you already have a Technician Profile account, log in and go to **Step 3**.

(You would have a profile manager account if you have previously accessed SureTrack® community or ALTUS Drive)


2

To create a an individual Technician Profile account, go to altusdrive.com and select **'Create Individual Account'**.



3


Login to your account and select the **"Device Management"** tab.

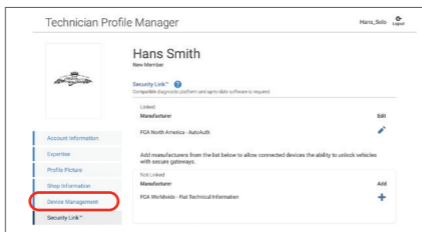

Enter your **Diagnostic Tool Pin Code** and **Serial Number** from the Get Connected screen of your Tool (See Step 1 at the beginning of these instructions).

4


Select the **'Security Link'** tab, select the OEM you wish to add to your account by selecting the '+'.

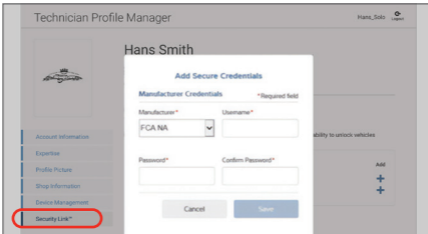

Follow the onscreen prompts to take you through the set-up process for that particular OEM. You will need to add each OEM individually.

5


Your Diagnostic Tool is now linked allowing you to access your Secure Vehicle Gateways.

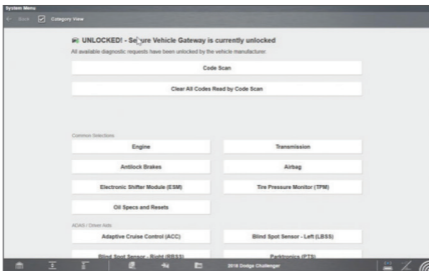

CREATING AN AUTOAUTH ACCOUNT

Some OEM's will require you to create an AutoAuth account. Where an AutoAuth account is required, it will be indicated in your Technician Profile account, next to the OEM name.

NOTE - AutoAuth charges an annual fee.

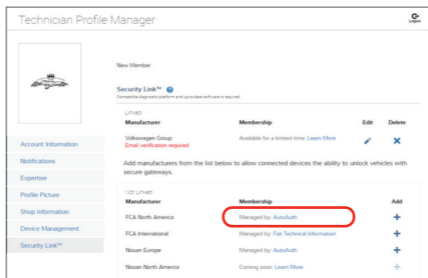

Make sure your diagnostic tool is connected to Wi-Fi before you start!

1

Go to autoauth.com and select “**Register Now**” and create an account.



Remember your Username and Password.

.....

2

Check your email and verify your account.


3

Login to autoauth.com and follow the link to complete your registration as a **“Service Center Signup / Independent Technician Signup”**.

After entering the required information select **“Sign Up”**.

4

Select the **“Manage Tools”** tab and enter the required information.

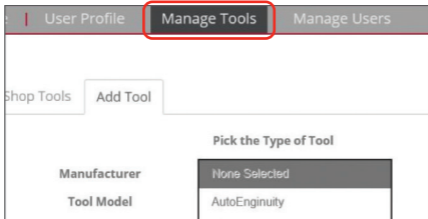

The screenshot shows a web interface with three tabs: 'User Profile', 'Manage Tools', and 'Manage Users'. The 'Manage Tools' tab is selected and highlighted with a red box. Below the tabs, there are two buttons: 'Shop Tools' and 'Add Tool'. The 'Add Tool' button is active. Below the buttons, there is a form titled 'Pick the Type of Tool'. The form has two columns: 'Manufacturer' and 'Tool Model'. The 'Manufacturer' field is empty. The 'Tool Model' field has a dropdown menu with 'None Selected' and 'AutoEnginuity' options.

5

When done select **“Add”**.

Add

Your AutoAuth account is now complete.

SNAP-ON[®] SECURITY LINK[™]

Using compatible diagnostic tools, now you can seamlessly connect to secure vehicle gateways

Snap-on is a trademark of Snap-on Incorporated. All rights reserved.
©Snap-on Incorporated 2022. EAZ0042L62D Rev. B

US

The Snap-on logo is located at the bottom right of the page. It features the brand name "Snap-on" in a bold, italicized, sans-serif font. The "S" is significantly larger and more stylized than the other letters. A registered trademark symbol (®) is positioned at the end of the word "on".